50AH-T Air Booster (Twin)




Application / Benefits

Effects of hydraulic clamp force using pneumatic TR, MTR series Large Type, HRS series applicable

Model No.



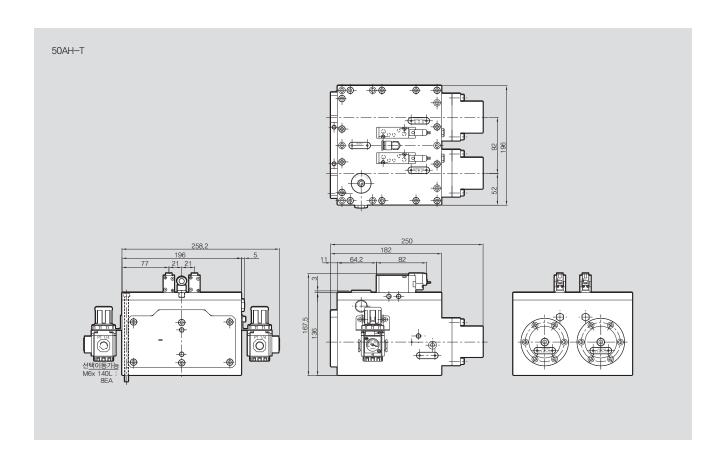

SPECIFICATIONS

Input Air Pressure	0.4 ~ 0.45
Output Hydraulic Pressure	3.2 ~ 3.6
Solenoid Voltage	DC 24V
Multiplication Ratio	1:8

Recommended Oil	Turbine Oil #32
Discharge Rate	50cc
Weight	12.5